



# ENVIRONMENTAL PRODUCT DECLARATION

In accordance with EN 15804 and ISO 14025



## VentFacade Top 30 mm

Realization data:

Version:



**ISOVER**  
SAINT-GOBAIN



## General Information

**Manufacturer:** Saint-Gobain Isover Yegorievsk

**PCR identification:** Saint-Gobain Methodological Guide for Construction Products (2012)

**Product name and manufacturer represented:**

VentFacade Top 30; Saint-Gobain Isover (Russia)

**Declaration issued:** 09 01 2014, valid until: 09 01 2019

## Product description

### Product description and description of use:

This Environmental Product Declaration (EPD) describes the environmental impacts of 1 m<sup>2</sup> of mineral wool.

Saint-Gobain Isover Yegorievsk uses natural and abundant raw materials (sand), using fusion and fiberising techniques to produce glass wool. The products obtained come in the form of a «mineral wool mat» consisting of a soft, airy structure.

On Earth, naturally, the best insulator is dry immobile air at 10°C: its thermal conductivity factor, expressed in  $\lambda$ , is 0.025 W/(m.K) (watts per meter Kelvin degree). The thermal conductivity of mineral wool is close to immobile air as its lambda varies from 0.030 W/(m.K) for the most efficient to 0.040 W/(m.K) to the least.

With its entangled structure, mineral wool is a porous material that traps the air, making it one of the best insulating materials. The porous and elastic structure of the wool also absorbs noise in the air, knocks and offers acoustic correction inside premises. Mineral wool containing incombustible materials does not fuel fire or propagate flames.

Mineral wool insulation (glass wool) is used in buildings as well as industrial facilities. It ensures a high level of comfort, lowers energy costs, minimizes carbon dioxide (CO<sub>2</sub>) emissions, prevents

heat loss through pitched roofs, walls, floors, pipes and boilers, reduces noise pollution and protects homes and industrial facilities from the risk of fire.

Mineral wool products last for the average building's lifetime (which is often set at 50 years as a default), or as long as the insulated building component is part of the building.





TECHNICAL DATA	PHYSICAL CHARACTERISTICS
The thermal resistance of the product	$K.m^2.W^{-1}$
The thermal conductivity of the product	$W/(m.K)$
Reaction to fire	
Meets the requirements of	
Acoustic properties	

## Description of the main product components and materials for 1 m<sup>2</sup> of product:

PARAMETER	VALUE	UNIT
Quantity of wool		g
Thickness of wool		mm
Surfacing		g
Packaging for the transportation and distribution	Paper for label: Wood pallet: Polyethylene: Thermaltransfer ribbon:	g
Product used for the Installation:	None	g

## LCA calculation information:


<b>FUNCTIONAL UNIT</b>	Providing a thermal insulation on 1 m <sup>2</sup> with a thermal resistance of equals $K.m^2.W^{-1}$ .
<b>SYSTEM BOUNDARIES</b>	Cradle to Grave: Mandatory stages = A1-3, A4-5, B1-7, C1-4 and Optional stage = D
<b>REFERENCE SERVICE LIFE (RSL)</b>	50 years
<b>CUT-OFF RULES</b>	The use of cut-off criterion on mass inputs and primary energy at the unit process level (1%) and at the information module level (5%); Flows related to human activities such as employee transport are excluded The construction of plants, production of machines and transportation systems are excluded since the related flows are supposed to be negligible compared to the production of the building product when compared at these systems lifetime level;
<b>ALLOCATIONS</b>	Allocation criteria are based on mass
<b>GEOGRAPHICAL COVERAGE AND TIME PERIOD</b>	Russia (Yegorievsk) 2012

According to EN 15804, EPD of construction products may not be comparable if they do not comply with this standard. According to ISO 21930, EPD might not be comparable if they are from different programmes.



## Life cycle stage

Flow diagram of the Life Cycle

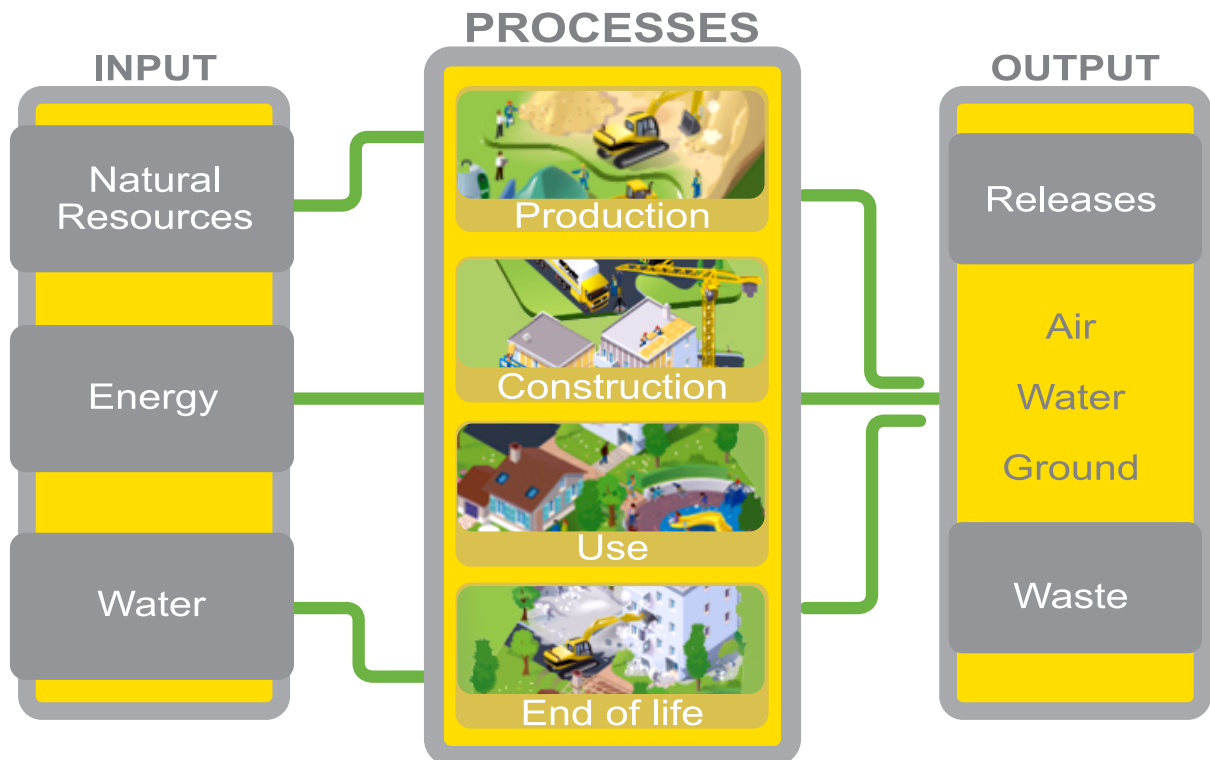

## Product stage, A1-A3

### ■ Description of the stage:

The product stage of the mineral wool products is subdivided into 3 modules A1, A2 and A3 respectively «Raw material supply», «transport» and «manufacturing». The aggregation of the modules A1, A2 and A3 is a possibility considered by the EN 15 804 standard. This rule is applied in this EPD.

### ■ A1, Raw material supply:

This module takes into account the extraction and processing of all raw materials and energy which occur upstream to the studied manufacturing process. Specifically, the raw material supply covers production of binder components and sourcing (quarry) of raw materials for fiber production, e.g. sand and borax for glass wool. Besides these raw materials, recycled materials (glass cullet) are also used as input.

### ■ A2, transport to the manufacturer:

The raw materials are transported to the manufacturing site. In our case, the modeling include: road and train transportations (average values) of each raw material.


### ■ A3, manufacturing:

This module includes manufacturing of products and manufacturing of packaging. Specifically, it covers glass production, binder production, glass wool fabrication (including melting and fiberization see process flow diagram) and packaging. The production of packaging material is taking into account at this stage.



## Glass wool production

### Manufacturing process flow diagram

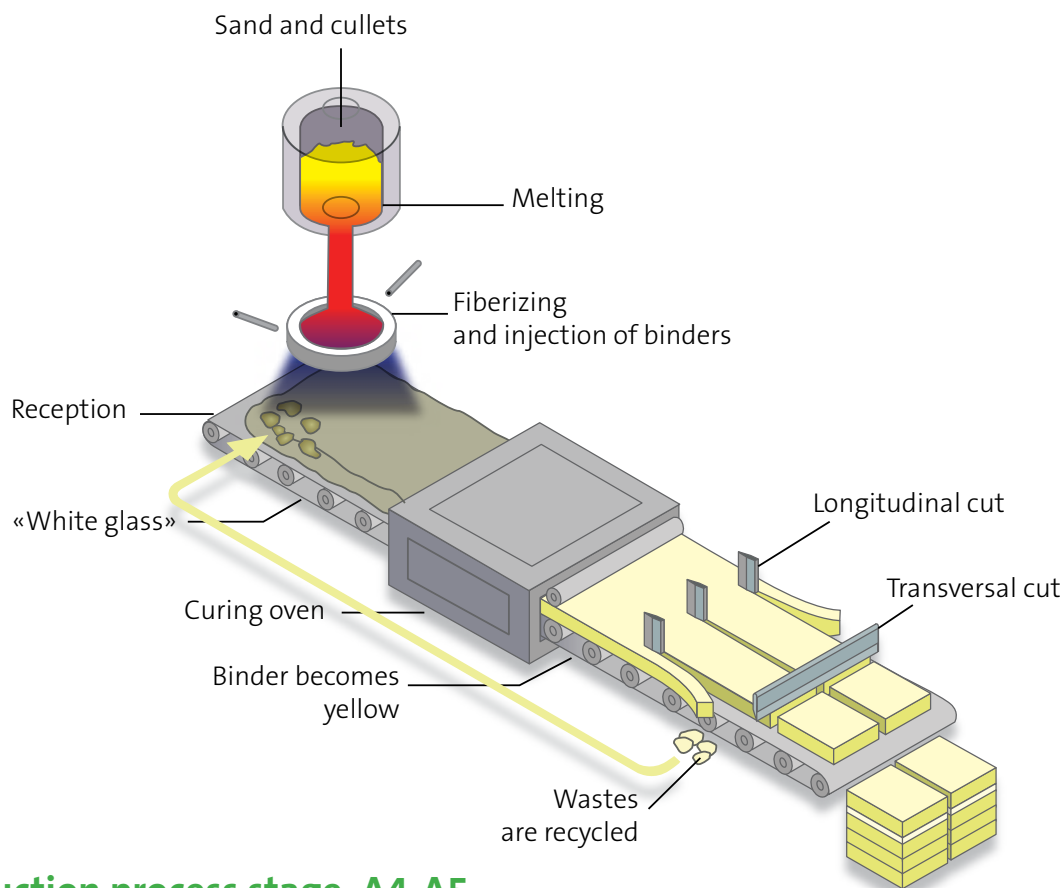

### Construction process stage, A4-A5

- **Description of the stage:**

The construction process is divided into 2 modules: A4, transport to the building site and A5, installation in the building.

- **Description of scenarios and additional technical information:**

**A4, Transport to the building site:**

This module includes transport from the production gate to the building site.

Transport is calculated on the basis of a scenario with the parameters described in the following table.

PARAMETER	VALUE
Fuel type and consumption of vehicle or vehicle type used for transport e.g. long distance truck, boat, etc.	Average truck trailer with a 24t payload, diesel consumption 38 liters for 100 km
Distance	km by truck km by train
Capacity utilisation (including empty returns)	100 % of the capacity in volume 30 % of empty returns
Bulk density of transported products	kg/m <sup>3</sup>
Volume capacity utilisation factor	1



## A5, Installation in the building:

This module includes wastage of products during the implementation, the additional production processes to compensate the loss and the waste processing which occur in this stage.

Scenarios used for quantity of product wastage and waste processing are:

PARAMETER	VALUE
Wastage of materials on the building site before waste processing, generated by the product's installation (specified by type)	5%
Output materials (specified by type) as results of waste processing at the building site e.g. of collection for recycling, for energy recovering, disposal (specified by route)	Packaging wastes are 100 % collected and modeled as recovered matter Glass wool losses are landfilled

## Use stage (excluding potential savings), B1-B7

### ■ Description of the stage:

The use stage is divided into the following modules:

- B1: Use
- B2: Maintenance
- B3: Repair
- B4: Replacement
- B5: Refurbishment
- B6: Operational energy use
- B7: Operational water use

### ■ Description of scenarios and additional technical information:

Once installation is complete, no actions or technical operations are required during the use stages until the end of life stage. Therefore mineral wool insulation products have no impact (excluding potential energy savings) on this stage.

## End-of-life stage C1-C4

### ■ Description of the stage:

The stage includes the different modules of end-of-life : C1, de-construction, demolition; C2, transport to waste processing; C3, waste processing for reuse, recovery and/or recycling; C4, disposal.

### ■ Description of scenarios and additional technical information:

#### C1, de-construction, demolition:

The de-construction and/or dismantling of insulation products take part of the demolition of the entire building. In our case, the environmental impact is assumed to be very small and can be neglected.

#### C2, transport to waste processing:

The model use for the transportation (see A4, transportation to the building site) is applied.

#### C3, waste processing for reuse, recovery and/or recycling:

The product is considered to be landfilled without reuse, recovery or recycling.

#### C4, disposal:

The glass wool is assumed to be 100% landfilled.



PARAMETER	VALUE / DESCRIPTION
Collection process specified by type	g of glass wool (collected with mixed construction waste)
Recovery system specified by type	No re-use, recycling or energy recovery
Disposal specified by type	g of glass wool are landfilled
Assumptions for scenario development (e.g. transportation)	Average truck trailer with a 24t payload, diesel consumption 38 liters for 100 km 25 km

## Reuse/recovery/recycling potential, D








- **Description of scenarios and additional technical information:**

Packaging wastes from module A5 are reported in this module as recovered matter

# LCA Results









LCA model, aggregation of data and environmental impact are calculated from the TEAM™ software 5.1.




Resume of the LCA results detailed on the following tables.





ENVIRONMENTAL IMPACTS																
PARAMETERS	Product Stage	Construction process stage		Use Stage							End-of-life stage				D Reuse, recovery, recycling	
	A1 A2 A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / Demolition	C2 Transport	C3 Waste processing	C4 Disposal		
 <b>Global warming potential (GWP)</b> kg CO <sub>2</sub> - equiv/FU				0	0	0	0	0	0	0	0		0	0	0	The global warming potential of a gas refers to the total contribution to global warming resulting from the emission of one unit of that gas relative to one unit of the reference gas, carbon dioxide, which is assigned a value of 1.
 <b>Ozone depletion (ODP)</b> kg CFC - equiv/FU				0	0	0	0	0	0	0	0		0	0	0	Destruction of the stratospheric ozone layer which shields the earth from ultraviolet radiation harmful to life. This destruction of ozone is caused by the breakdown of certain chlorine and/or bromine containing compounds (chlorofluorocarbons or halons), which break down when they reach the stratosphere and then catalytically destroy ozone molecules.
 <b>Acidification potential (AP)</b> kg SO <sub>2</sub> - equiv/FU				0	0	0	0	0	0	0	0		0	0	0	Acid depositions have negative impacts on natural ecosystems and the man-made environment incl, buildings. The main sources for emissions of acidifying substances are agriculture and fossil fuel combustion used for electricity production, heating and transport.
 <b>Eutrophication potential (EP)</b> kg (PO <sub>4</sub> ) <sub>3</sub> - equiv/FU				0	0	0	0	0	0	0	0		0	0	0	Excessive enrichment of waters and continental surfaces with nutrients, and the associated adverse biological effects.
 <b>Photochemical ozone creation (POPC)</b> - Ethene equiv/FU				0	0	0	0	0	0	0	0		0	0	0	Chemical reactions brought about by the light energy of the sun. The reaction of nitrogen oxides with hydrocarbons in the presence of sunlight to form ozone is an example of a photochemical reaction.
 <b>Abiotic Depletion Potential for non-fossil resources (ADP-elements)</b> - kg Sb equiv/FU				0	0	0	0	0	0	0	0		0	0	0	
 <b>Abiotic Depletion Potential for fossil resources (ADP-fossil fuels)</b> - MJ/FU				0	0	0	0	0	0	0	0		0	0	0	Consumption of non-renewable resources, thereby lowering their availability for future generations.



## RESOURCE USE

PARAMETERS	Product Stage	Construction process stage		Use Stage							End-of-life stage				D Reuse, recovery, recycling
	A1 A2 A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / Demolition	C2 Transport	C3 Waste processing	C4 Disposal	
 Use of renewable primary energy excluding renewable primary energy resources used as raw materials - MJ/FU				0	0	0	0	0	0	0	0		0	0	0
 Use of renewable primary energy used as raw materials MJ/FU	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
<b>Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials) - MJ/FU</b>				0	0	0	0	0	0	0	0		0	0	0
 Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials - MJ/FU				0	0	0	0	0	0	0	0		0	0	0
 Use of non-renewable primary energy used as raw materials - MJ/FU	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
<b>Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials) - MJ/FU</b>				0	0	0	0	0	0	0	0		0	0	0
 Use of secondary material - kg/FU		0		0	0	0	0	0	0	0	0	0	0	0	
 Use of renewable secondary fuels - MJ/FU	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
 Use of non-renewable secondary fuels - MJ/FU	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
 Use of net fresh water - m <sup>3</sup> /FU				0	0	0	0	0	0	0	0		0	0	0

WASTE CATEGORIES															
PARAMETERS	Product Stage	Construction process stage		Use Stage							End-of-life stage				D Reuse, recovery, recycling
	A1 A2 A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / Demolition	C2 Transport	C3 Waste processing	C4 Disposal	
 Hazardous waste disposed kg/FU				0	0	0	0	0	0	0	0		0	0	0
 Non-hazardous waste disposed kg/FU				0	0	0	0	0	0	0	0		0		0
 Radioactive waste disposed kg/FU				0	0	0	0	0	0	0	0		0	0	0

OUTPUT FLOWS															
PARAMETERS	Product Stage	Construction process stage		Use Stage							End-of-life stage				D Reuse, recovery, recycling
	A1 A2 A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / Demolition	C2 Transport	C3 Waste processing	C4 Disposal	
 Components for re-use kg/FU	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
 Materials for recycling kg/FU				0	0	0	0	0	0	0	0		0	0	0
 Materials for energy recovery kg/FU	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
 Exported energy MJ / FU				0	0	0	0	0	0	0	0		0	0	0



## LCA interpretation

	Product (A1-A3)	Transport (A4)	Installation (A5)	Use (B)	End-of-Life (C)	Total Environmental impacts of the product	Recycling Positive benefits of recycling (D)
<b>Global Warming</b> 	3.16	0.44	0.19	0.00	0.01	<b>3.79</b> kg CO <sub>2</sub> equiv/FU	0.00
<b>Non-renewable resources consumption [1]</b> 	47.73	5.77	2.84	0.00	0.12	<b>56.46</b> MJ/FU	0.00
<b>Energy consumption [2]</b> 	75.92	6.31	4.30	0.00	0.12	<b>86.65</b> MJ/FU	0.00
<b>Water consumption [3]</b> 	0.01	0.00	0.00	0.00	0.00	<b>0.01</b> m <sup>3</sup> /FU	0.00
<b>Waste production [4]</b> 	0.35	0.02	0.21	0.00	1.95	<b>2.53</b> kg/FU	0.00

[1] This indicator corresponds to the abiotic depletion potential of fossil resources.

[2] This indicator corresponds to the total use of primary energy.

[3] This indicator corresponds to the use of net fresh water.

[4] This indicator corresponds to the sum of hazardous, non-hazardous and radioactive waste disposed.